





Project Reference: _____

Fixture Type: _____ Cat. No: _____ Voltage: _____ Finish: _____ Notes: _____

MODULO EXE low glare high performance 4-ft and 5-ft architectural pendants

T8, T5, T5/HO

CSA/UL or equivalent

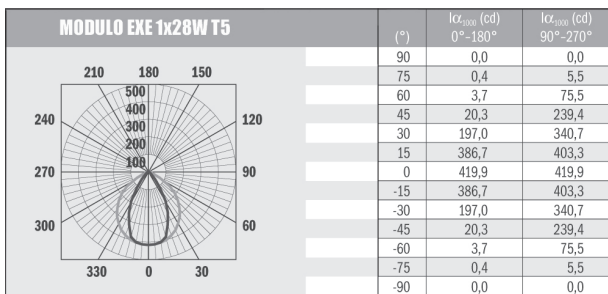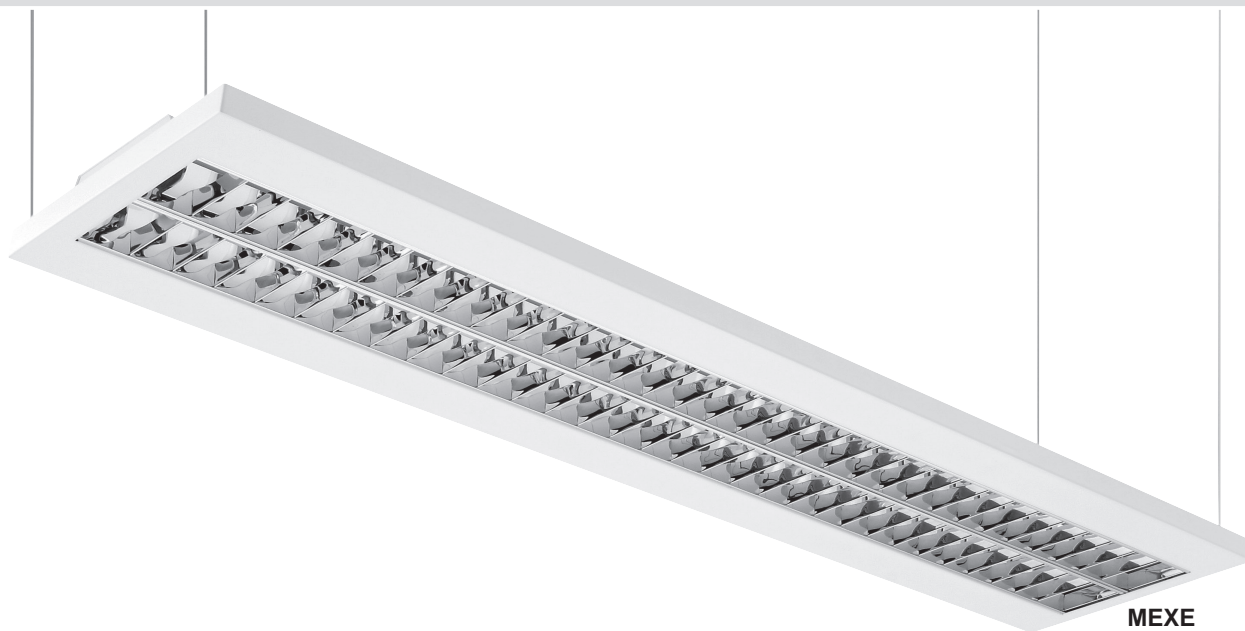

ORDERING INFORMATION

MODULO EXE		LAMPS	AxBxC	Y1xY2
		(W)	(mm)	(mm)
4'	T5	1x28	1208x198x58	1144x106
5'	T5	1x35	1508x198x58	1444x106
5'	T8	1x40	1508x198x58	1444x106
4'	T5 HO	1x54	1208x198x58	1144x106
5'	T5 HO	1x80	1508x198x58	1444x106
4'	T5	2x28	1208x278x58	1144x186
5'	T5	2x35	1508x278x58	1444x186
5'	T8	2x40	1508x278x58	1444x186
4'	T5 HO	2x54	1208x278x58	1144x186
5'	T5 HO	2x80	1508x278x58	1444x186

120 V 60 Hz 220 V 50 Hz 240 V 50 Hz 347V 60 Hz T5 G5 ELB ELB-DIM ELB-DIM EMERGENCY F

IP 20 Approved to UL/cUL, CSA, CE and GS/TÜV or equivalent



- Hi-Lo switching without affecting the appearance
- high quality, premium performance optical system
- Alanod 316G12-99.95 specular ALU louver 62 cells
- heavy gauge, precise tolerance steel housing
- powder coated white, custom finishes available
- electronic ballast, emergency ballast optional
- 108V, 120V, 277V, 347V/60 Hz and 220-240V/50Hz
- max. six years fixture warranty

Specifications are subject to change without notice.

QUESTIONS? Please call customer service at 1-800-49-LAMPS (800-495-2677) or contact your local VALUELIGHT representative