


IP 65 ◆ ▲ ▲ Class I Ⓢ  
 Wall luminaires with 2 light outputs.  
 Extruded aluminium cylinder body.  
 Die cast aluminium top and bottom cover with tempered safety glass.  
 Die cast aluminium wall bracket.  
 Stainless steel screws.  
 UV stabilized polyester powder coating.  
 Silicone gasket.

Available color : Black  
 Silver  
 White


Applicable lamp : Reflector lamp

OD-5001	2XR63	E27	60W.	2X960cd.
OD-5001	2XPAR20	E27	50W.	2X1100cd.
OD-5002	2XR80	E27	75W.	2X345cd.
OD-5002	2XPAR30	E27	75W.	2X2400cd.
OD-5003	2XR95	E27	100W.	2X1350cd.
OD-5003	2XPAR38	E27	120W.	2X3100cd.
OD-5008	2XR95	E27	150W.	2X2250cd.
OD-5008	2XPAR38	E27	120W.	2X3100cd.

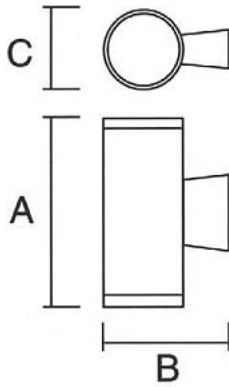

Dimension

	A	B	C
OD-5001	250	165	105
OD-5002	350	220	140
OD-5003	435	255	175
OD-5008	450	300	220

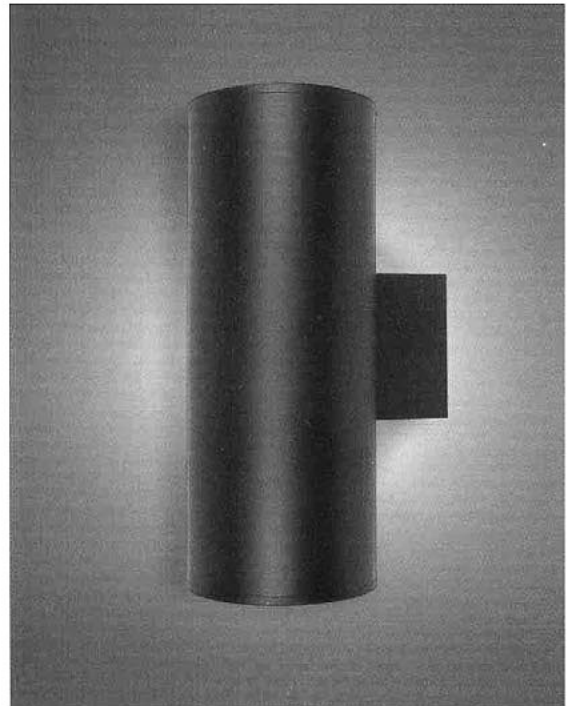

practical ideas  
 you need to  
 design specify  
 superior  
 lighting systems