


IP 65  Class I

- Corrosion resistant and vandal proof
- Die cast aluminium housing and front cover
- Stainless steel screws
- UV Stabilized and impact resistant opal polycarbonate diffuser
- Silicone gasket
- Integral control gear
- UV Stabilized polyester powder coating
- Available color : Black / Silver / White

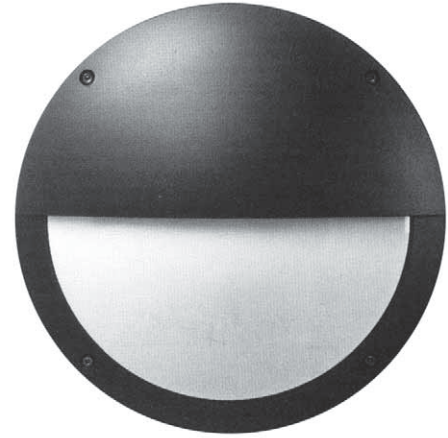

Applicable lamp

Standard incandescent				
OD-7015	1XA60	E27	60W	730lm
OD-7016	1XA60	E27	100W	1380lm
Compact fluorescent				
OD-7015	1XTC	G23	9W	600lm
OD-7015	1XTC-D	G24 d-2	18W	1200lm
OD-7016	1XTC-D	G24 d-3	26W	1800lm
Electronic compact Fluorescent				
OD-7015	1XTC-DSE	E27	11W	600lm
OD-7015	1XTC-DSE	E27	15W	900lm
OD-7016	1XTC-DSE	E27	20W	1200lm



Dimension

	A	B
OD-7015	265	125
OD-7016	360	170

