


INDIRECT LIGHT OUTPUT

IP 55 ⚡⚡⚡ Class I ☹

Corrosion resistant die cast aluminium body components
 Extruded aluminium pole
 Stainless steel screws
 UV Stabilized impact resistant opal or prismatic polycarbonate diffuser
 Integral control gear
 UV Stabilized polyester powder coating
 Available color : Black / Silver / White
 Mounting plate with anchore bolts for installations is available separately

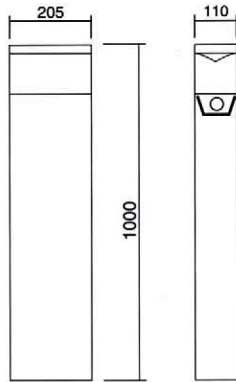

Applicable lamp

Standard incandescent			
1XA60	E27	60W	730lm
Compact fluorescent			
1XTC-D	G24 d-2	18W	1200lm

CAT. OD-7136

